


TYPICAL CROSSSECTION,

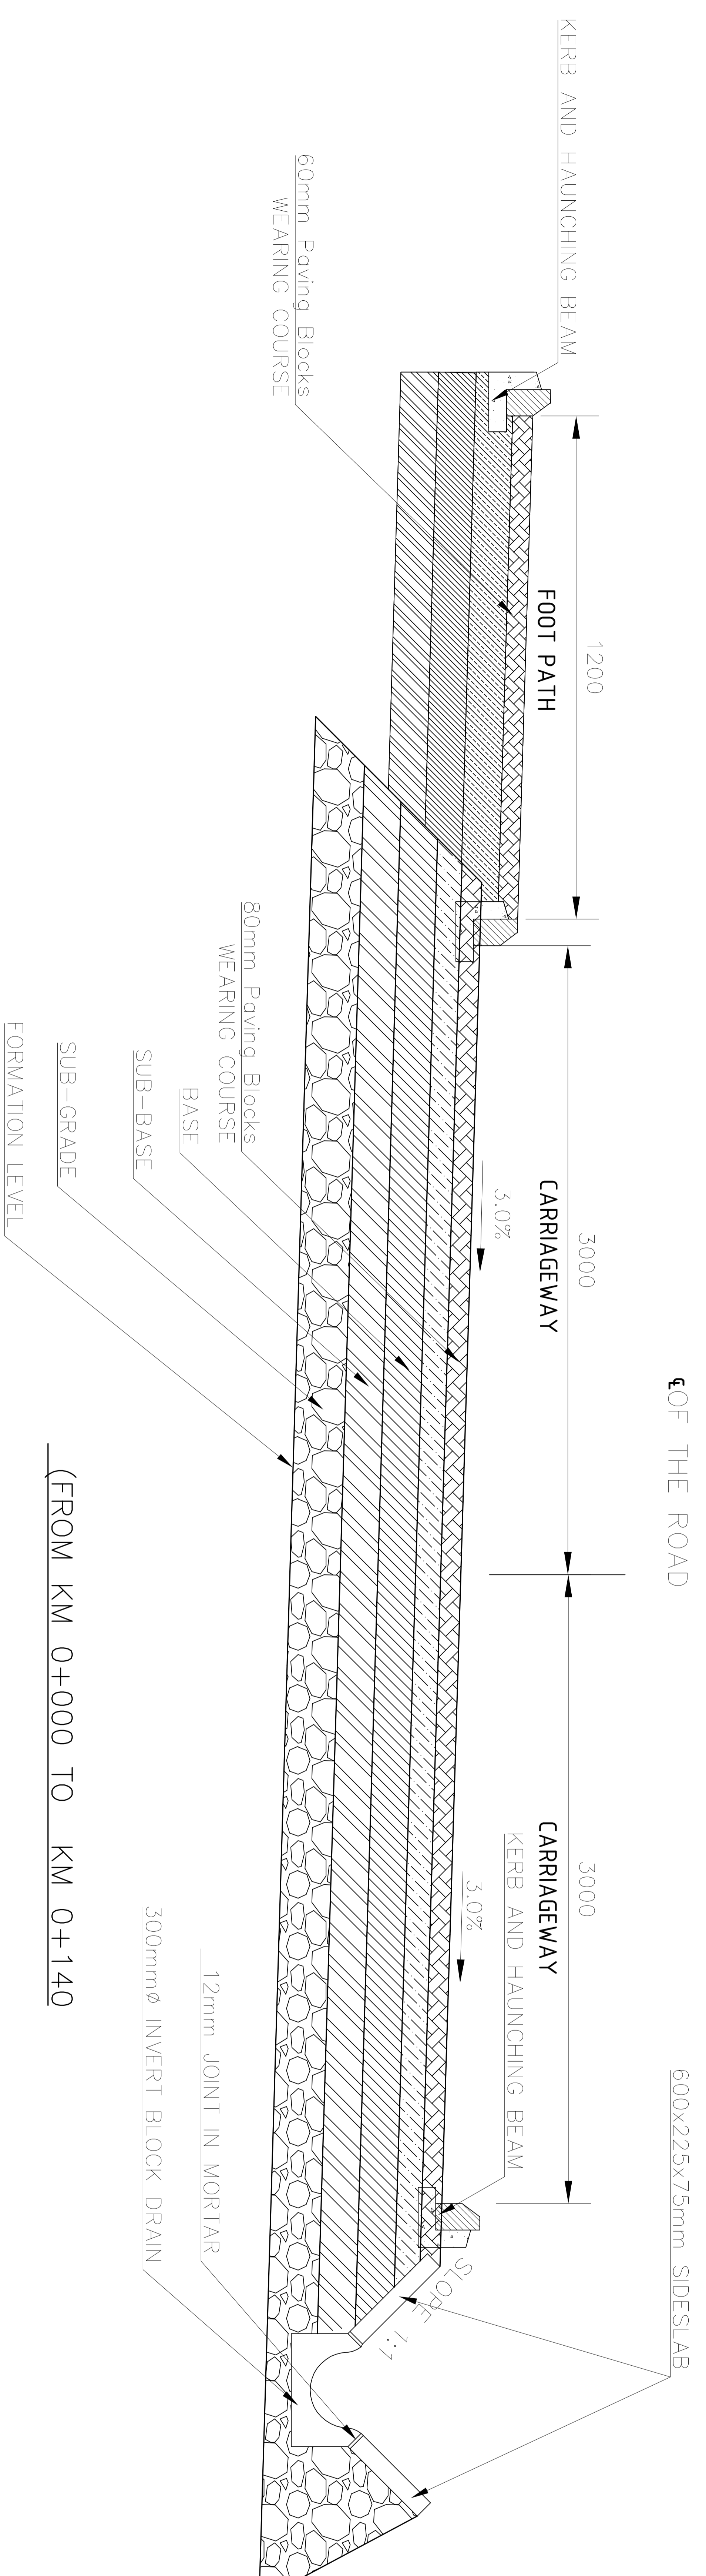

PAVEMENT LAYERS				
SURFACE TREATMENT	WEARING COURSE	BASE	SUB-BASE	SUB-GRADE
	80mm PAVING BLOCKS(on 100mm SAND BED)	150mm NEAT CRUSHED STONE	150mm CEMENT TREATED SAND	300mm IMPROVED SUBGRADE (WELL COMPACTED)

NOTES:

1. ALL DIMENSIONS IN mm UNLESS STATED OTHERWISE.
2. CONCRETE BEAM AT THE DGE PF THE CARRIAGEWAY SHALL BE JOINTED AFTER EVERY 2m IF NON- REINFORCED OR 5m IF MINIMALLY REINFORCED.
3. TIGHT INTERLOCKING OF THE PAVING BLOCKS SHALL BE ACHIEVED TO ENSURE MINIMAL INFILTRATION OF WATER.
4. THE SLOPE OF THE CARRIAGEWAY SHALL BE A MINIMUM OF 3% TO ENSURE EFFICIENT DRAINAGE.
5. THE BLOCKS SHALL BE LAID IN A HERRINGBONE PATTERN AT 45° TO THE KERBING.